

Smart and scalable residential all-in-one energy storage solution


- ✓ Fast, hassle-free and lower cost installation
- ✓ Scalable and flexible solution
- ✓ Highest safety and optimized performance
- ✓ Smart, Seamless Energy Management


The GoodWe ESA Series is an all-in-one residential energy storage solution (ESS) that combines reliability and advanced functionality. It integrates the inverter, battery, UPS-grade switching, and battery enclosure in a pre-wired modular system-streamlining installation and reducing costs.


Compact, elegantly designed, and IP66-rated for durability, the unit operates reliably indoors or outdoors in any weather conditions. With smart controls, scalable storage, and flexible configurations, the ESA empowers homeowners to manage their energy needs with confidence and ease.


The innovative modular and stackable design ensures adaptability, growing alongside your household energy demands and making true energy independence simpler than ever.



 AI-driven EMS and <4ms UPS-level switching

 Smart home integration with multi-protocol communications

 Allows different capacities of old and new batteries mixing

 Supports 6 batteries per stack, scalable up to 48kWh

Technical Data		GW3K-EHA-G20	GW3.6K-EHA-G20	GW5K-EHA-G20	GW6K-EHA-G20	GW8K-EHA-G20	GW10K-EHA-G20
Battery Side							
Battery Type							LiFePO ₄
Nominal Battery Voltage (V)							380
Battery Voltage Range (V)							350 ~ 550
Start-up Voltage (V) ¹							380
Number of Battery Input							1
Max. Continuous Charging Current (A)	11.9	14.3	19.8	23.7	31.6	35.6	
Max. Continuous Discharging Current (A)	8.7	10.5	14.5	17.4	23.2	29.0	
Max. Charging Power (kW)	4.5	5.4	7.5	9.0	12.0	13.5	
Max. Discharging Power (kW)	3.3	3.96	5.5	6.6	8.8	11.0	
PV Side							
Max. Input Power (kW)	6.0	7.2	10.0	12.0	16.0	20.0	
Max. Input Voltage (V) ²							600
MPPT Operating Voltage Range (V) ³							40 ~ 560
Start-up Voltage (V)							50
Nominal Input Voltage (V)							400
Max. MPPT Current (A)							20
Max. MPPT Short Circuit Current (A)							26
Number of MPPTs	2	2	2	2	4	4	
Number of Strings per MPPT	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1 / 1 / 1	1 / 1 / 1 / 1	
AC Side (On-grid)							
Nominal Power (kW)	3.0	3.6	5.0	6.0	8.0	10.0	
Nominal Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Apparent Power from Grid (kVA) ⁴	6.0	7.2	10.0	12.0	14.5	14.5	
Nominal Voltage (V)							220 / 230 / 240, L / N / PE
Voltage Range (V)							170 ~ 280
Nominal Frequency (Hz)							50 / 60
Frequency Range (Hz)							45 ~ 55 / 55 ~ 65
Max. Current to Grid (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	
Max. Current From Grid (A) ⁴	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	32.8 @ 220V 31.4 @ 230V 30.0 @ 240V	45.5 @ 220V 43.5 @ 230V 41.7 @ 240V	50.0 @ 220V 50.0 @ 230V 50.0 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	
Power Factor							~1 (Adjustable from 0.8 leading to 0.8 lagging)
THDi							<3%
Back-up Side							
Nominal Output Apparent Power (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Output Apparent Power (kVA)	3.0 (6.0, 10s)	3.6 (7.2, 10s)	5.0 (10.0, 10s)	6.0 (12.0, 10s)	8.0 (16.0, 10s)	10.0 (20.0, 10s)	
Max. Output Apparent Power (Bypass) (kVA)	6.0	7.2	10.0	12.0	14.5	14.5	
Max. Output Current (A) ⁵	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	
Max. Output Current (Bypass) (A) ⁵	27.3	32.8	45.5	50.0	63.0	63.0	
Nominal Output Voltage (V)							220 / 230 / 240, L / N / PE
Nominal Output Frequency (Hz)							50 / 60
THDv (@Linear Load)							<3%
Efficiency							
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.5%	97.5%	
European Efficiency	96.5%	96.5%	96.8%	97.0%	96.8%	96.8%	
Max. Battery to AC Efficiency	98.0%	98.0%	98.0%	98.0%	97.8%	97.8%	
Protection							
PV String Current Monitoring							Integrated
PV Insulation Resistance Detection							Integrated
Residual Current Monitoring							Integrated
PV Reverse Polarity Protection							Integrated
Battery Reverse Polarity Protection							Integrated
Anti-islanding Protection							Integrated
AC Overcurrent Protection							Integrated
AC Short Circuit Protection							Integrated
AC Overvoltage Protection							Integrated
DC Surge Protection							Type II
AC Surge Protection							Type II
RSD							Optional
AFCI							Integrated
Remote Shutdown							Integrated
General Data							
Operating Temperature Range (°C)							-35 ~ +60 (Derating at +40)
Relative Humidity							0 ~ 95%
Max. Operating Altitude (m)							4000 (>2000 derating)
Cooling Method							Natural convection
User Interface							LED, WLAN + APP
Communication with BMS							CAN
Communication							RS485, WiFi + LAN + Bluetooth
Communication Protocols							Modbus-RTU, Modbus-TCP
Weight (kg)	24	24	24	24	26	26	
Dimension (W x H x D mm)							800 x 300 x 270
Noise Emission	≤30	≤30	≤30	≤30	≤35	≤35	
Topology							Non-isolated
Ingress Protection Rating							IP66
Mounting Method							Wall / Floor Mounted

*1: If there's no PV, start-up voltage will be 380V.
 *2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.
 *3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.
 *4: GOODWE ESA series has internal bypass 63A passthrough ability to support whole home backup solution. If the customer don't want to do any breaker upgrade, the main breaker size in SolarGo (or SEMS+) can be set as previous breaker size.
 *5: If the Back-up port is not used, select an appropriate circuit breaker based on the AC Max. Output Current.
 *: Please visit GoodWe website for the latest certificates.

Technical Data		GW5.1-BAT-D-G20	GW8.3-BAT-D-G20
Battery Type		LFP (LiFePO ₄)	
Rated Energy (kWh)		5.12	8.32
Usable Energy (kWh)		5.0 ¹	8.0 ¹
Operating Voltage Range (V) (single phase system)		350 ~ 550	
Operating Voltage Range (V) (three phase system)		700 ~ 950	
Max. Input Current (System) (A)		12.0	19.0
Max. Output Current (System) (A)		13.2	21.0
Max. Input Power (System) (kW) ²		5.0	8.0
Max. Output Power (System) (kW) ²		5.0	8.0
Peak Output Power (System) (kW) ²		7.5 @10s	12 @10s
Charging Temperature Range (°C)		-18 ~ +55	-18 ~ +55
Discharging Temperature Range (°C)		-20 ~ +55	
Relative Humidity		4 ~ 100%	
Max. Operating Altitude (m)		4000	
Noise Emission (dB)		≤29	≤29
Communication		CAN	CAN
Weight (kg)		57.5 ± 1	79 ± 1
Ingress Protection		IP66	
Dimensions (W × H × D mm)		800 × 326 × 270	
Function Configuration		Heating (Integrated); Aerosol fire extinguishing (Integrated)	
Max. Storage time		12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)	
Scalability ³		12 pcs	
Mounting Method		Floor stacked / Wall-mounted	
Cycle Life ⁴		≥8000	≥8000
Standard and Certification	Safety	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC, VDE2510	
	EMC	CE, RCM	
	Transportation	UN38.3, ADR	

*1: Test conditions, 100% DOD (cell 2.85~3.6V voltage range), 0.2P charge & discharge at 25±2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge/discharge rate, environmental conditions (e.g. temperature), transport and storage factors.


*2: Max. Input Power /Max. Output Power/Peak Output Power derating will occur related to Temperature and SOC.

*3: For single-column stacked installations, the maximum number of parallel units is 6.

*4: Based on test data under specific laboratory conditions.

*: Based on Lynx D G2 Series technology

*: Please visit GoodWe website for the latest certificates.

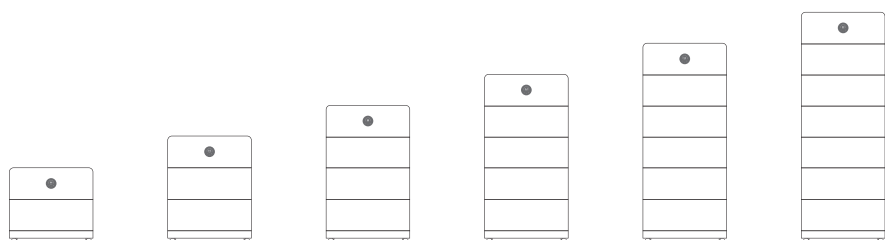

Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh, with 5.1 batt module)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh, with 8.3 batt module)	8.32	16.64	24.96	33.28	41.60	49.92