

Driving the World's Smart Energy Future



Scan and Follow GoodWe

Disclaimer

The technical data above mentioned may be modified in order to reflect continuous technical innovation and improvements achieved by GoodWe's R & D team. GoodWe has the sole right to make such modification at any time without further notice. GoodWe's customers have the right to request the latest version of GoodWe product datasheets and any commercial contracts that may be signed will be based on the most recent version of the datasheet at the moment of signing the contract.

Copyright © GoodWe Technologies Co., Ltd. 2024. All rights reserved.



Solution for
Utility-Scale Solar
Powering Tomorrow's Energy Landscape




Elevate Your Energy Infrastructure

As the world transitions towards sustainable energy solutions, the role of utility-scale projects in meeting the growing demand for renewable power has never been more critical. Solar power plants provide utility-scale energy providers with a clean, renewable option. They deliver a steady electricity supply at a consistent rate, thereby circumventing higher costs associated with peak demand periods.


At GoodWe, we are proud to be at the forefront of this transformation, offering cutting-edge solutions designed to power tomorrow's infrastructure. Our comprehensive range of products and services is designed to empower large-scale projects around the world, enabling them to harness the power of renewable energy and drive sustainable development. From high-performance inverters to advanced monitoring platforms, our solutions are engineered to meet the unique challenges and requirements of utility-scale installations.

Discover GoodWe's Utility-Scale Solutions

At GoodWe, we now offer a comprehensive range of utility-scale solutions tailored to meet the demands of large-scale renewable energy projects. Our lineup includes high-performance HT and UT string inverters, MV Stations for seamless grid connection, as well as communication devices and data loggers for comprehensive monitoring and control. Designed to deliver exceptional performance, reliability, and efficiency, GoodWe's utility-scale solutions provide an integrated approach to utility-scale installations. With our commitment to excellence and innovation, GoodWe is your trusted partner in driving the success of utility-scale projects worldwide.

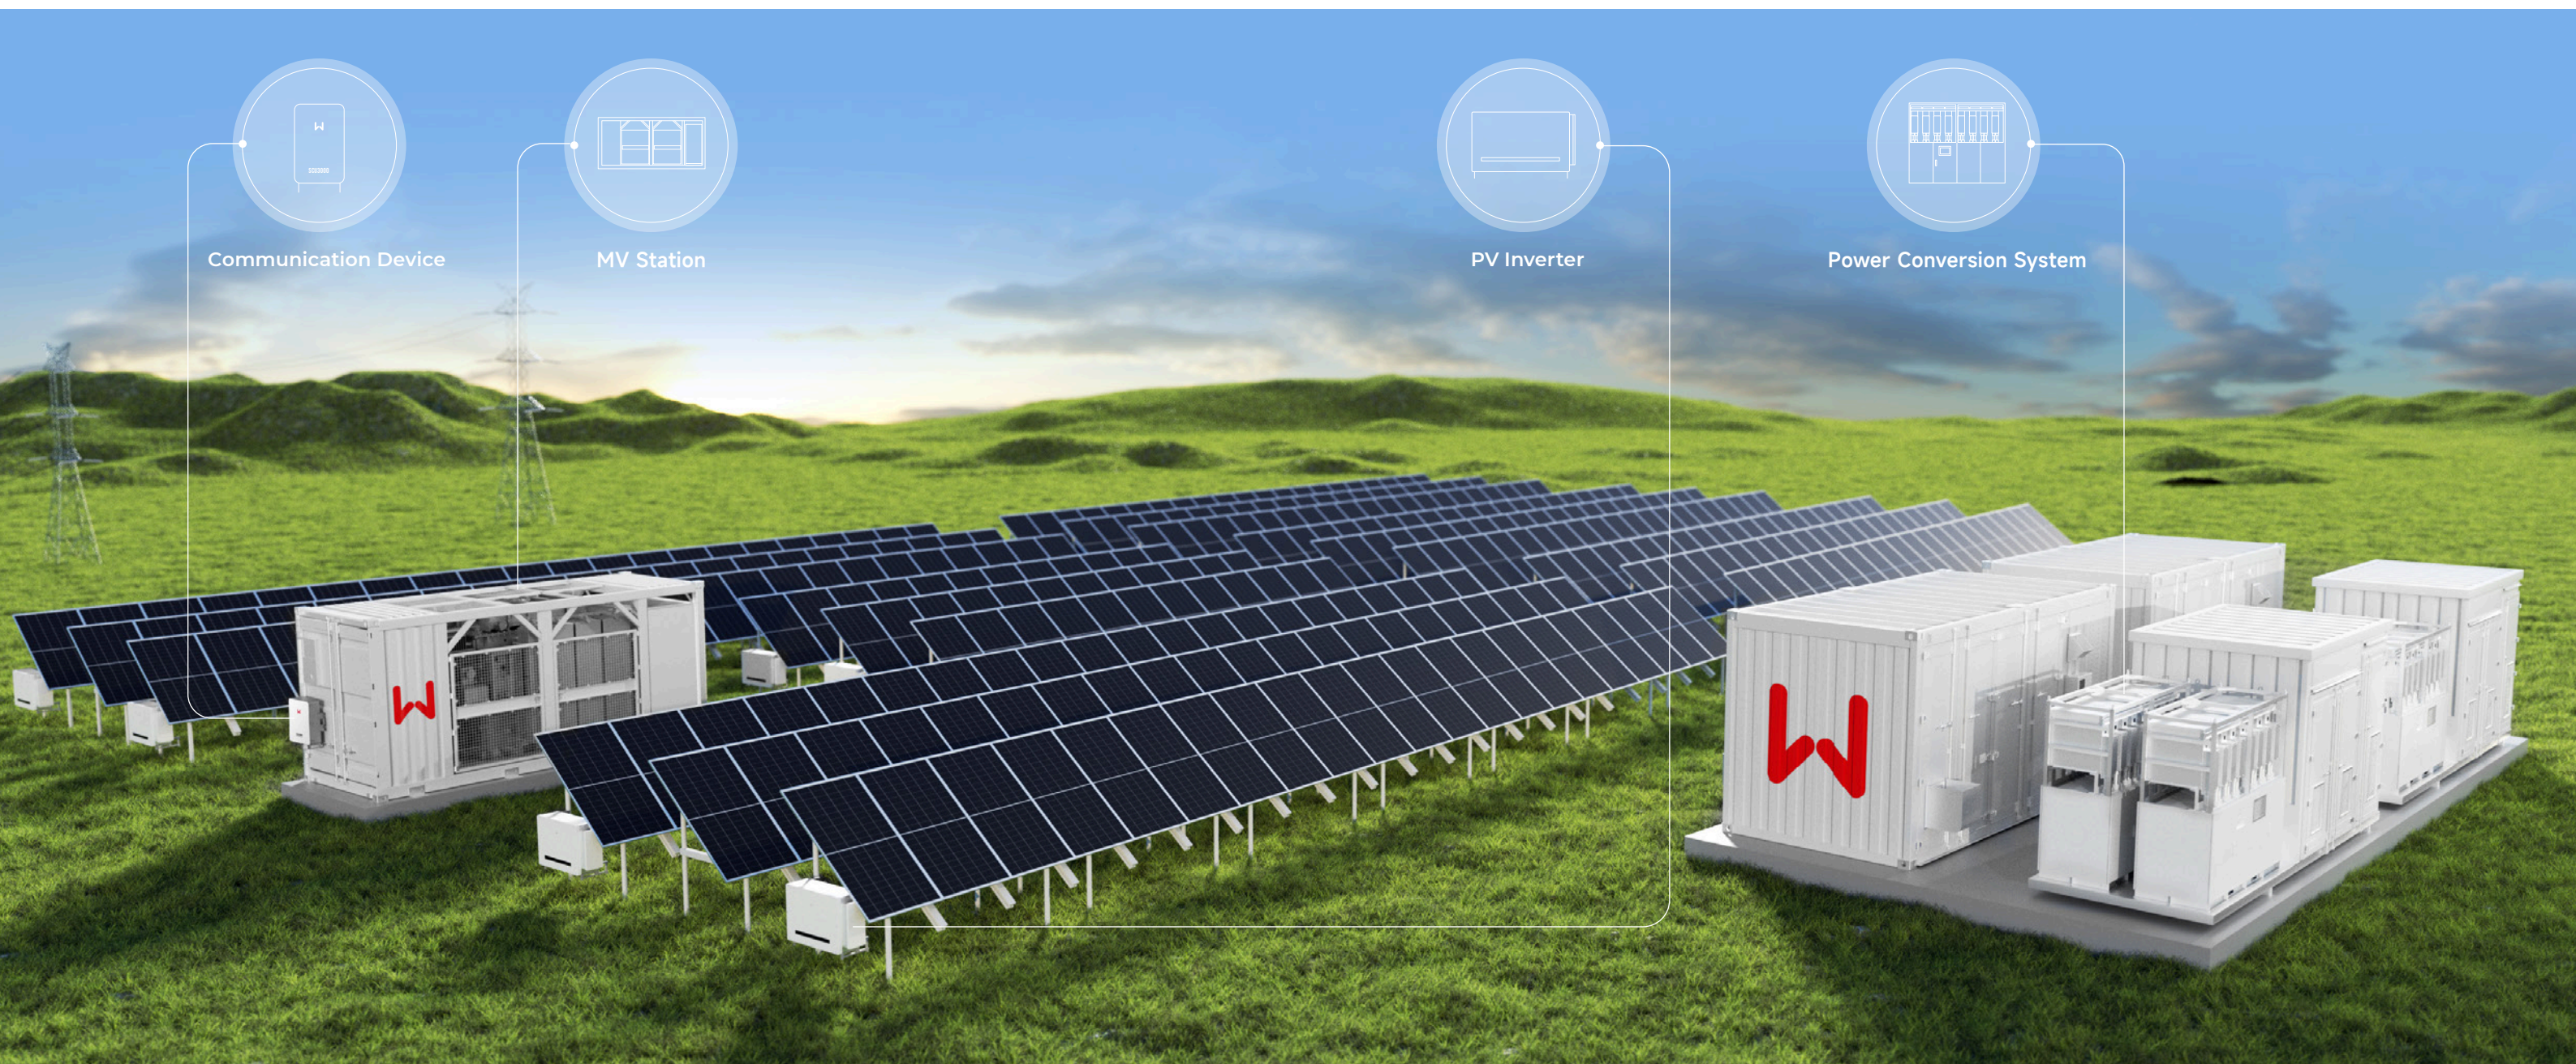


Overall Solution & Benefits

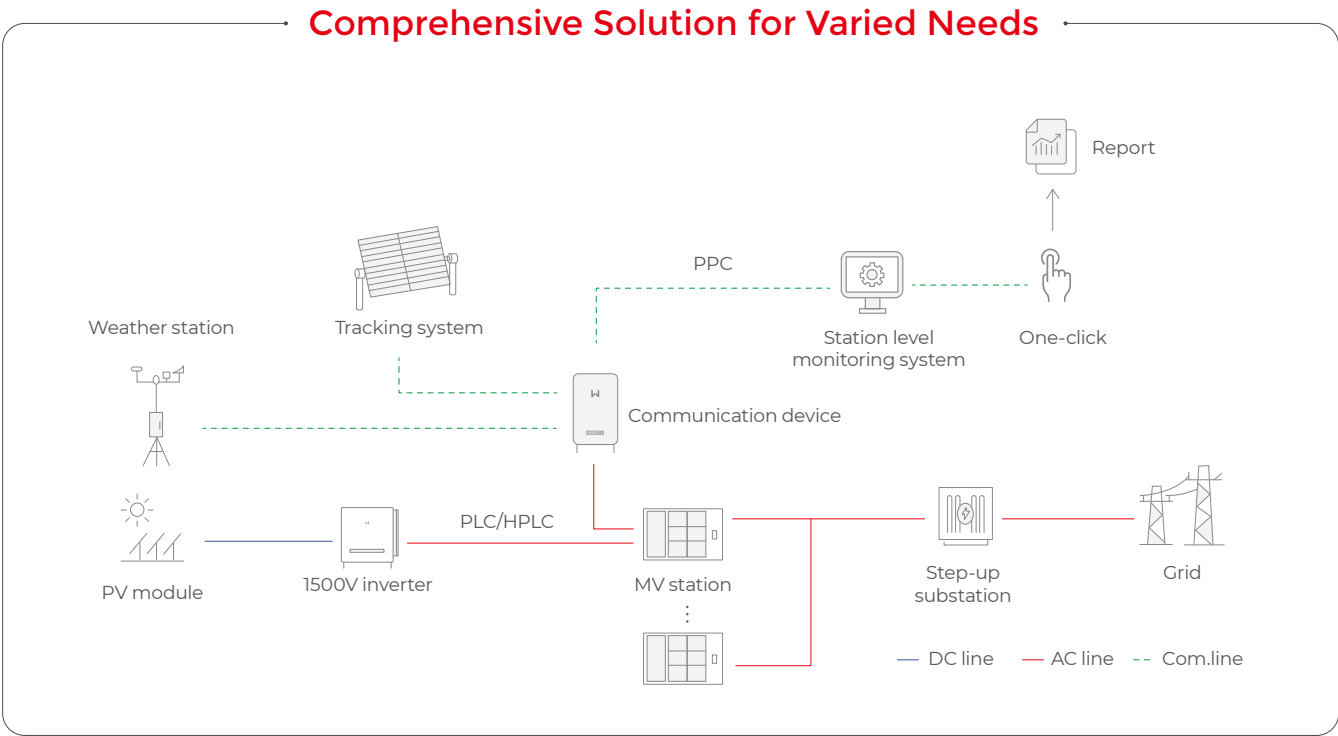

Easy O&M

- IV curve diagnosis & remote shutdown
- Convenient configuration
- Flexible monitoring solutions
- High failure detection capabilities

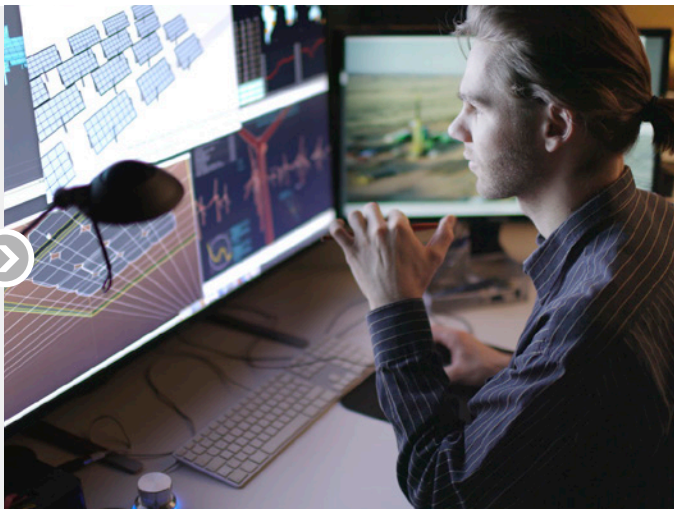


Efficiency and High Performance

- Advanced MPPT algorithms for maximum energy capture
- High conversion efficiency for optimal power output
- Consistent performance in diverse environmental conditions

Reliability and Durability

- Robust design with high-quality components
- Rigorous testing ensures reliability in various conditions
- Longevity backed by warranty and proven track record

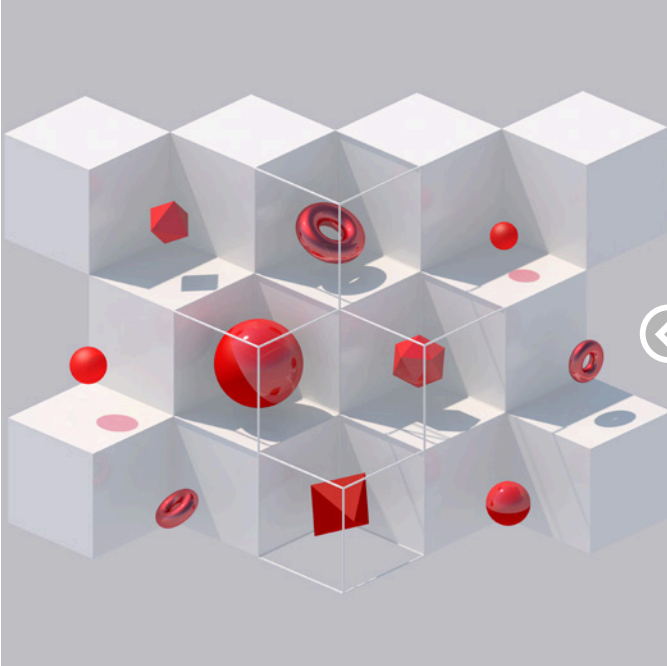

Scalability and Adaptability

- Modular design for easy integration and expansion
- Compatibility with different system sizes and configurations
- Flexibility to meet changing project requirements

Grid Compatibility and Stability

- Compliance with grid standards and regulations
- Power quality management ensures grid stability
- Integration with smart grid technologies enhances reliability



HT Series

225/250kW | Three Phase | 6/12 MPPTs

The new HT1500V Series (225/250kW) is GoodWe’s top inverter with an extensive list of features designed to reduce system and O&M costs. It is a perfect choice for the utilization of utility-scale centralized PV plants to maximize the return of investment. The HT1500V Series boasts options of 6 MPPTs and 12 MPPTs, reactive power compensation, and is compatible with bifacial 182mm/210mm modules. It features string level monitoring for intelligent detection of current issues. The series is also equipped with optional Anti-PID function and can realize 24-hour monitoring. For GW225KN-HT & GW250KN-HT, the unique mechanism of smart string protection switch is supported for the DC side protection against short circuits or reverse connections. The configuration of the HT1500V can be easily done via bluetooth, while firmware diagnosis and upgrading can be operated remotely. These outstanding sets of features were conceived to ensure the lowest levelized cost of energy (LCOE) and a utility that runs efficiently.



Smart O&M

- String level monitoring
- Real-time monitoring



Lower Cost

- AC terminal ready for 300mm² aluminum cables
- Reactive power compensation at night



Superb Safety & Reliability

- Smart string protection switch¹
- Type II SPD for both DC and AC



Higher Yields

- 20A max. current per string¹
- Anti-PID function

1: For GW225KN-HT and GW250KN-HT only.

Technical Data	GW225K-HT	GW250K-HT	GW225KN-HT	GW250KN-HT
Input				
Max. Input Voltage (V)	1500			
MPPT Operating Voltage Range (V)	500 ~ 1500			
Start-up Voltage (V)	550			
Nominal Input Voltage (V)	1160			
Max. Input Current per MPPT (A)	30	30	60	60
Max. Short Circuit Current per MPPT (A)	50	50	90	90
Number of MPP Trackers	12	12	6	6
Number of Strings per MPPT	2	2	3	3
Output				
Nominal Output Power (kW)	225	250	225	250
Nominal Output Apparent Power (kVA)	225	250	225	250
Max. AC Active Power (kW)	247.5	250	247.5	250
Max. AC Apparent Power (kVA)	247.5	250	247.5	250
Nominal Output Voltage (V)	800, 3L / PE			
Output Voltage Range (V)	640 ~ 920			
Nominal AC Grid Frequency (Hz)	50 / 60			
AC Grid Frequency Range (Hz)	45 ~ 55 / 55 ~ 65			
Max. Output Current (A)	178.7	180.5	178.7	180.5
Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)			
Max. Total Harmonic Distortion	<3%			
Efficiency				
Max. Efficiency	99.0%			
European Efficiency	98.5%	98.5%	98.7%	98.7%
Protection				
PV String Current Monitoring	Integrated			
PV Insulation Resistance Detection	Integrated			
Residual Current Monitoring	Integrated			
PV Reverse Polarity Protection	Integrated			
Anti-islanding Protection	Integrated			
AC Overcurrent Protection	Integrated			
AC Short Circuit Protection	Integrated			
AC Overvoltage Protection	Integrated			
DC Switch	Integrated			
DC Surge Protection	Type II			
AC Surge Protection	Type II			
Emergency Power Off	Optional			
Remote Shutdown	Optional			
Anti-PID	Optional			
PID Recovery	Optional			
Reactive Power Compensation at Night	Integrated			
Power Supply at Night	Integrated			
General Data				
Operating Temperature Range (°C)	-30 ~ +60			
Relative Humidity	0 ~ 100%			
Max. Operating Altitude (m)	5000 (>4000 derating)			
Cooling Method	Smart Fan Cooling			
User Interface	LED (LCD optional), Bluetooth + APP			
Communication	RS485 or PLC			
Communication Protocols	Modbus RTU			
Weight (kg)	111			
Dimension (W × H × D mm)	1091 × 678 × 341			
Topology	Non-isolated			
Self-consumption at Night (W)	<18			
Ingress Protection Rating	IP66			
DC Connector	MC4-Evo2 (4 ~ 6mm²)			
AC Connector	OT / DT terminal (Max. 300mm²)			

*: Please visit GoodWe website for the latest certificates.
*: The product appearance shown is GW225KN-HT / GW250KN-HT. The appearance may vary for GW225K-HT / GW250K-HT.

UT Series

320/350kW I Three Phase I 12/15 MPPTs

The UT 1500V Series (320/350kW) is GoodWe's new three-phase string inverter designed to increase the profitability of utility-scale projects. Offering options of 12 MPPTs and 15 MPPTs, this series comes with a maximum string input current of 15/20A, thus supporting bifacial 182mm/210mm module access. The Anti-PID (Potential Induced Degradation) and PID-recovery functions are available to mitigate and recover from PID effects. Moreover, designed for harsh outdoor environments, the UT inverter is built to withstand extreme temperatures, with a wide operating range of -35°C to +60°C. With enhanced safety, optimal LCOE, and ensured cost-effectiveness, the high-performance UT inverter provides a future-ready solution for utility-scale PV projects.



Higher Yields

- 20A max. DC input current per string¹
- Anti-PID and PID recovery



Superb Safety & Reliability

- IP66 and optional C5 protection
- Full power operation at high temperatures: 350kW@40°, 320kW@45°



Lower Costs

- Reactive power compensation at night
- High-speed Power Line Communication (HPLC) for reduced wiring costs



Grid Friendly

- Stable operation under weak grid conditions:SCR≥1.2
- Dynamic reactive power response <30ms

1: For GW320KH-UT and GW350KH-UT only.

Technical Data		GW320K-UT	GW320KH-UT	GW350K-UT	GW350KH-UT
Input					
Max. Input Voltage (V)			1500		
MPPT Operating Voltage Range (V)			480 ~ 1500		
Start-up Voltage (V)			500		
Nominal Input Voltage (V)			1160		
Max. Input Current per MPPT (A)	30	40	30	40	
Max. Short Circuit Current per MPPT (A)	50	60	50	60	
Number of MPP Trackers	15	12	15	12	
Number of Strings per MPPT			2		
Output					
Nominal Output Power (kW)	320	320	352	352	
Nominal Output Apparent Power (kVA)	320	320	352	352	
Max. AC Active Power (kW)	352	352	352	352	
Max. AC Apparent Power (kVA)	352	352	352	352	
Nominal Output Voltage (V)			800, 3L / PE		
Output Voltage Range (V)			720 ~ 880		
Nominal AC Grid Frequency (Hz)			50 / 60		
AC Grid Frequency Range (Hz)			45 ~ 55 / 55 ~ 65		
Max. Output Current (A)			254		
Power Factor		-1 (Adjustable from 0.8 leading to 0.8 lagging)			
Max. Total Harmonic Distortion			<3%		
Efficiency					
Max. Efficiency			99.01%		
European Efficiency			98.80%		
Protection					
PV String Current Monitoring			Integrated		
Internal Humidity Monitoring			Integrated		
PV Insulation Resistance Detection			Integrated		
Residual Current Monitoring			Integrated		
PV Reverse Polarity Protection			Integrated		
Anti-islanding Protection			Integrated		
AC Overcurrent Protection			Integrated		
AC Short Circuit Protection			Integrated		
AC Overvoltage Protection			Integrated		
DC Switch			Integrated		
DC Surge Protection			Type II		
AC Surge Protection			Type II		
Anti-PID and PID recovery			Optional		
Reactive Power Compensation at Night			Optional		
Power Supply at Night			Integrated		
I-V Curve Scan			Optional		
General Data					
Operating Temperature Range (°C)			-35 ~ +60		
Relative Humidity			0 ~ 100%		
Max. Operating Altitude (m)			5000 (>4000 derating)		
Cooling Method			Smart Fan Cooling		
User Interface			LED, LCD (Optional), WLAN + APP		
Communication			RS485 or HPLC		
Communication Protocols			Modbus RTU		
Weight (kg)			124		
Dimension (W × H × D mm)			1120 × 810 × 368		
Topology			Non-isolated		
Self-consumption at Night (W)			<3		
Ingress Protection Rating			IP66		
DC Connector			MC4 (4 ~ 6mm², 10mm² Optional)		
AC Connector			OT / DT terminal (Max. 400mm²)		

*: Please visit GoodWe website for the latest certificates.

GoodWe-Single page-20240411-EN-V2.1. Information may be subject to change without notice during product improving.

MV Station

3.5/5/7/9.152MVA

GoodWe Medium-voltage Station, a compact step-up power center, is capable of withstanding various types of environments. It offers the highest power density in an energy-efficient and safe solution comprised of MV switchgear, transformer, and LV switchgear for power transformation in large-scale solar plants. The pre-assembled and cost-effective solution is integrated into a prefabricated 20ft container, ideal for easy transportation and quick installation. The Plug-and-Play design makes grid connection exceptionally easy and rapid, and the modular architecture allows for simplified maintenance. All contained electrical components are type-tested according to strict safety standards, providing safety for operators.



Cost-saving Solution

- 20ft container for easy transportation
- A complete pre-assembled solution to minimize deployment



High Reliability & Safety

- Type-tested components of reliable quality
- Suitable for harsh environments



Easy Operation & Maintenance


- Plug-and-play installation
- Integrated modular design simplifying maintenance



Trustworthy

- Compatible with HT/UT inverters*
- Outstanding adaption to extreme environments

CIRCUIT DIAGRAM

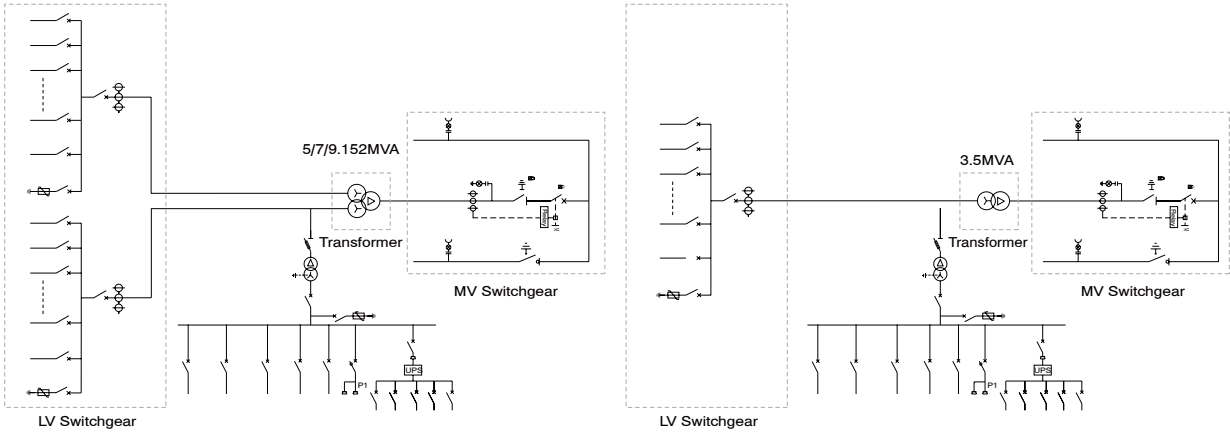

*: For GW3500K-MVS, GW5000K-MVS, GW7000K-MVS, the MCCB model of UT needs to be selected separately.

Model					GW3500K-MVS	GW5000K-MVS	GW7000K-MVS	GW9100K-MVS
Transfomer								
Transformer Type					Oil immersed			
Rated Power (kVA)	3500kVA@40°C	5000kVA@40°C	7000kVA@40°C	9152kVA@40°C				
Winding Connection	Dy11	Dy11-y11	Dy11-y11	Dy11 - y11				
LV / MV Voltage (kV)	0.8 / 10 ~ 35	0.8 / 10 ~ 35	0.8 / 10 ~ 35	0.8 / 20 ~ 35				
Maximum Input Current at Nominal Voltage (A)	2526	2 × 1805	2 × 2526	2 × 3302				
Frequency (Hz)					50 / 60			
Tapping range					±2 × 2.5%			
Peak Efficiency Index					≥99%			
Cooling Type					ONAN (Oil Natural Air Natural)			
Impedance	7.0% (±10%)	7.5% (±10%)	8.0% (±10%)	9.5% (±10%)				
Oil Type					Mineral oil (PCB free)			
Winding Material					Al / Al			
Insulation Class					A			
MV Switchgear								
Insulation Type					SF6			
Rate Voltage (kV)	12.0 ~ 40.5	12.0 ~ 40.5	12.0 ~ 40.5	24.0 ~ 40.5				
Rate Current (A)					630			
Internal Arcing Fault					IAC AFL 20kA / 1s			
Qty.of Feeder	2-3 feeders (D / V / C)					3 feeders (DCV, Optional: CCV)		
LV Room								
ACB Specification	3200A / 800Vac / 3P, 1pcs	3200A / 800Vac / 3P, 2pcs	3200A / 800Vac / 3P, 2pcs	4000A / 800Vac / 3P, 2pcs				
MCCB Specification	250A / 800Vac / 3P, 14pcs 320A / 800Vac / 3P, 10pcs	250A / 800Vac / 3P, 20pcs 320A / 800Vac / 3P, 14pcs	250A / 800Vac / 3P, 28pcs 320A / 800Vac / 3P, 20pcs	320A / 800Vac / 3P, 26pcs				
Protection								
AC Input Protection					Circuit breaker			
Transformer Protection					Oil-temperature, oil-level,oil-pressure			
LV Overvoltage Protection					AC Type I + II			
General Date								
Dimensions (W × H × D mm)					6058 × 2896 × 2438			
Approximate Weight (t)	<22	<22	<22	<25				
Operating Temperature Range (°C)	-25 ~ +55					-25 ~ 55 (>40°C derating)		
Auxiliary Power Supply	5kVA / 400V (Optional: max. 20kVA)					5kVA / 400V (Optional: max. 50kVA)		
Ingress Protection Rating					IP54			
Relative Humidity					0 ~ 95%			
Max. Operating Altitude (m)					1000 (Optional: 2000)			
Anti-corrosion Class					C4H (Optional: C5M)			
Communication					Standard: RS485, Ethernet Optional: Optical Fiber			
Compliance	IEC 60076, IEC 62271-200, IEC 62271-202, IEC 61439-1/2, EN50708					IEC 60076, IEC 62271-200, IEC 62271-202, IEC 61439-1/2, EN50708-1, CE		

*: Please visit GoodWe website for the latest certificates

GoodWe-Single page-20240729-EN-V2.1. Information may be subject to change without notice during product improving.

SCU3000

GoodWe provides the SCU3000 (Solar Communication Unit) to achieve optimal data acquisition and centralized monitoring & maintenance for devices within PV systems. With its flexible networking and easy operations, the unit is an ideal choice for smart inverters in large-scale commercial and industrial (C&I) as well as utility-scale PV projects. Additionally, it supports optical fiber ring network communication to ensure accurate data transmission between PV sub-arrays.



- SD memory card for log storage and export
- Embedded Web server for batch configuration and upgrade
- Support of multiple protocols
- Support of various communication ports

Model	SCU3000-S	SCU3000	SCU3000A-S	SCU3000A
Communication				
Max. Inverters Supported	200			
RS485 interface	8			
Ethernet	2 × RJ45, 10 / 100Mbps			
Number of PLC	1 × PLC	2 × PLC	1 × HPLC	2 × HPLC
Input Voltage Range of PLC (V)	800			
Configuration				
Datalogger	EzLogger3000U × 1	EzLogger3000U × 1	EzLogger3000U-A × 1	EzLogger3000U-A × 1
Fibre Channel Switch	2 optical ports, 6 electrical ports			
Fiber Termination Box	24 ports, SC single-mode			
Power Supply	100 ~ 240Vac, 50 / 60Hz			
Power Consumption (W)	≤30	≤35	≤30	≤35
Mechanical				
Dimensions (W × H × D mm)	723 × 780 × 226			
Weight (kg)	25	28	25	28
Installation Method	Wall mounting, bracket mounting, pole mounting			
Environment				
Operating Temperature Range (°C)	-30 ~ +60			
Storage Temperature Range (°C)	-40 ~ +70			
Relative Humidity	5 ~ 95%			
Max. Operating Altitude (m)	5000			
Ingress Protection Rating	IP65			

*: Please visit GoodWe website for the latest certificates.
*: All pictures shown are for reference only. Actual appearance may vary.

Smart DataLogger

GoodWe’s Smart DataLogger EzLogger3000U is designed for data acquisition, transmission, and protocol conversion in utility-scale PV projects. In combination with a GoodWe solar inverter, it can easily read and record all key plant data and constantly transmit the data to the GoodWe or third-party SCADA systems via the internet.



- Connecting up to 200 devices
- Support of multiple protocols
- Data breakpoint resume
- USB and embedded web for data reading and software upgrade

Model	EzLogger3000U	EzLogger3000U-A
Device Management		
Max. Number of Connected Devices	200	
Electrical		
AC Power Supply	100 ~ 240V, 50 / 60Hz	
DC Power Supply	24V	
Power Consumption (W)	≤27	
Communication Interface		
LAN	2	
PLC	1×PLC	1×HPLC
RS485	COM × 8	
Digital / Analog Input/Output	DI × 8, DO × 4, AI × 8	
PT100 / PT1000	PT100×2, PT1000×2	
Active DO	12V, 100mA	
Communication Protocol		
Ethernet	Modbus-TCP, IEC 60870-5-104	
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645	
User Interface		
LED	LED × 4	
WEB	Embedded Web	
USB	USB 2.0 x 1	
Mechanical		
Dimensions (W × H × D mm)	430 × 44 × 161	
Weight (kg)	1.2	
Installation Method	Wall Mounting, DIN Rail Mounting, Tabletop Mounting	
Environment		
Operating Temperature Range (°C)	-30 ~ +60	
Storage Temperature Range (°C)	-40 ~ +70	
Relative Humidity	5 ~ 95%	
Max. Operating Altitude (m)	5000	
Ingress Protection Rating	IP20	

*: Please visit GoodWe website for the latest certificates.

| Case Studies



74 MW solar project in Thessaloniki, Greece

Solution:

230 units of 250kW-HT string inverter
86 units of 100kW-HT string inverter
SEC1000 communication device



80MW PV Project in Gansu, China

Solution:

356 units of 225kW-HT string inverter

Expected Benefits



Maximizes the plant's yield generation in high temperature areas due to an advanced design and unique late temperature derating



Brings in a high level of digitalization and uptime for utility solar farms through its PLC and Anti-PID technology

System Benefits



Optimizes local economic and industrial structures while fostering environmental protection and economic growth



Generates 186.84 million kWh yearly



Cuts CO₂ emissions by 142,800 tons annually

50MW Fishery-Photovoltaic Complementary Project in Hubei, China

Solution:

157 units of 350kW-UT string inverter



11 MW PV project located in Perak, Malaysia

Solution:

52 units of 250kW-HT string inverter
2 units of 6750kVA MV Station
SCB3000 communication device
SolarOS monitoring platform



System Benefits



Combines fishery farming with PV to maximize land efficiency



Provides locals with varied revenue sources



Generates 70,400 MWh yearly



Saves 234,600 tons of coal and cuts 633,400 tons of CO₂ annually

Expected Benefits



Produces 24.095 GWh, generating yearly revenues of \$1 million



Lowers emissions by 17.1 metric tons annually

GoodWe - Bankable Brand with Higher Product Reliability

GoodWe is a world-leading PV inverter manufacturer and smart energy solution provider established in 2010. The company has around 5,000 employees worldwide and has a track record of over 71 GW of installations in over 100 countries and regions. GoodWe offers an extensive range of products and solutions tailored for residential, commercial and industrial, and utility-scale PV systems, delivering reliable and high-performance solutions across its entire portfolio. In 2021, GoodWe was recognized as one of the top three hybrid inverter suppliers worldwide by Wood Mackenzie.



Global Presence with Local Service



Reliability and Innovation



3 Production Facilities

China: Suzhou, Guangde
Vietnam: Haiphong

4 R&D Centers


China: Suzhou, Shenzhen,
Wuhan, Nanjing



Bankable brand with
higher product reliability

GoodWe is recognized as a bankable brand with higher product reliability by DNV. Concluded from the report issued in 2021, DNV views GoodWe as a well-established manufacturer of power conversion products with a successful history in design and manufacturing.

GoodWe's positive operating performance and solid potential over the period has landed it the highest Altman-Z score among PV manufacturers on BloombergNEF's 2021 report, displaying its strong financial health and bankability.

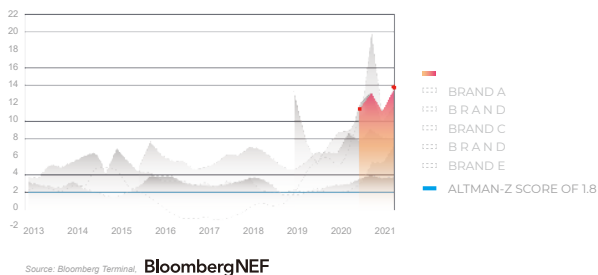

Source: Bloomberg Terminal, BloombergNEF

Quality Assurance at Every Stage

Emphasizing quality as our priority, GoodWe upholds the highest standards in every aspect of our operations. From customer satisfaction to product performance, our commitment to excellence drives innovation and growth in the renewable energy sector.

